




## F44AC G-50 TL

- Patent pending design with good ergonomics
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- Limited recoil resulting from balanced weight distribution
- Tool-less jam clearing mechanism provides an easy access to the nose if the staple jams
- Multi-directional exhaust adjusts without tools
- Includes a sequential fire / bump fire (Single Shot / Contact Trip) device, which is the safest in the world
- Depth control dial for precise countersinking
- Solid and durable design for the most demanding jobs

### STAPLE TYPE

Senco G5562 (=N), Atro 100, BeA 14/155, Haubold KG700

## TOOL TYPE



44AC G-50 TL

## TOOL CHARACTERISTICS


Height	Width	Length	Weight
310 mm	92 mm	345 mm	2.25 kg
12.20 inch	3.62 inch	13.58 inch	4.95 lbs

**Pressure** 5 - 7 bar | 70 / 100 psi

**Air consumption per shot** 1.16 l  
Performances at 90 psi / 6.2 bar (0.62 MPa)

**Lubricant** Aerospace Lubricants Tribolube 12

## FASTENER DATA

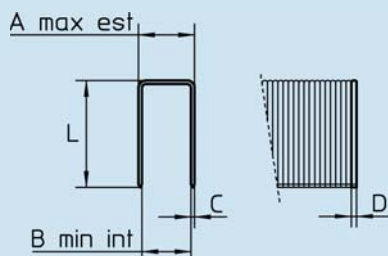

<b>A) Outside Crown</b>	11.10 mm	0.437 inch
<b>B) Inside Crown</b>	7.60 mm	0.299 inch
<b>CxD) Wire</b>	1.40 x 1.60 mm	0.055 x 0.062 inch
<b>L) Length</b>	25 - 50 mm	1 - 2 inch
<b>Magazine Capacity</b>	155 staples	
<b>Staple Type</b>	Senco G5562 (=N), Atrio 100, BeA 14/155, Haubold KG700	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 92.02 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 81.50 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

3.47 m/s<sup>2</sup>

## ACTUATION & LOADING

**Actuation System** Single Shot and Contact Actuation

**Loading** Top Loading

## APPLICATIONS

- sheathing
- subflooring
- roof decking
- furniture frames
- pallets
- crate and box assembly
- vinyl siding

### FASCO S.R.L. Italy

Via B. Buozzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

