


**PATENTED**  
**ONE TRIGGER SYSTEM**



## F1B 7C-16 AUTOMATIC

- Possess the same performances as the Standard Version
- A **world-wide patented one trigger system** enables the operator to switch from simple shot to auto fire during the operation
- Fewer components in the valve area and its design, which offers an easy and trouble-free maintenance, make the tool robust and simple
- One hand control allows the operator to set the desired speed without leaving the hold on the tool with his hand
- Oversized metal cap and metal insert reduces vibrations and fatigue while keeping the max. speed (over 1.600 cycles per minute)

## TOOL TYPE



1B 7C-16 AUT

## TOOL CHARACTERISTICS


Height	Width	Length	Weight
167 mm	42 mm	218 mm	1070 g
6.57 inch	1.65 inch	8.58 inch	2.36 lbs

**Pressure** 5 - 7 bar | 70 / 100 psi

**Air consumption per shot** 0.17 l in aut.  
Performances at 90 psi / 6.2 bar (0.62 MPa)

**Lubricant** Aerospace Lubricants Tribolube 12

## FASTENER DATA

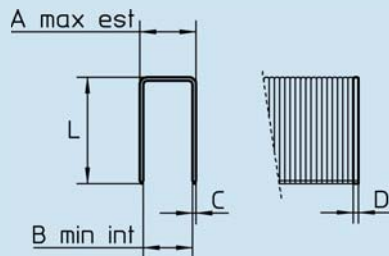

<b>A) Outside Crown</b>	9.00 mm	0.354 inch
<b>B) Inside Crown</b>	7.70 mm	0.303 inch
<b>CxD) Wire</b>	0.60 x 0.75 mm	0.023 x 0.029 inch
<b>L) Length</b>	6 - 16 mm	1/4 - 5/8 inch
<b>Magazine Capacity</b>	180 staples	
<b>Staple Type</b>	BeA 71, Senco 3G (=C), Atro 7, Bostitch 7	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 87.27 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 79.10 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by UNI EN ISO 12100-1/2

## ACTUATION & LOADING

**Actuation System\*** 5  
(Safety : No)

**Loading\*** Bottom Loading

\*see instruction manual

## APPLICATIONS

- upholstering
- sofas
- dust covers
- insulation

### F WORLD-WIDE PATENTED: ONE TRIGGER SYSTEM

The new automatic design features a rapid valve controlled uniquely by the trigger itself. If the trigger is slightly depressed, the tool works in single shot system. By depressing the trigger fully, the tool switches over to the automatic firing sequence.

## FASCO S.R.L. Italy

Via B. Buoizzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

**FASCO**  
AIR DRIVEN TOOLS

MEMBER OF THE  
**beck**  
FASTENER GROUP