




## F21T SG-25

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Wide air storage for a high speed

## TOOL TYPE



21T SG-25

## TOOL CHARACTERISTICS


Height	Width	Length	Weight
216 mm	49 mm	228 mm	1.21 kg
8.50 inch	1.93 inch	8.98 inch	2.65 lbs

**Pressure** 4 - 7 bar | 60 / 100 psi

**Air consumption per shot** 0.43 l  
Performances at 90 psi / 6.2 bar (0.62 MPa)

**Lubricant** Aerospace Lubricants Tribolube 12

## FASTENER DATA

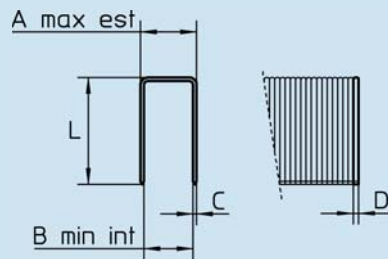

<b>A) Outside Crown</b>	10.10 mm	0.397 inch
<b>B) Inside Crown</b>	7.80 mm	0.307 inch
<b>CxD) Wire</b>	1.00 x 1.25 mm	0.039 x 0.049 inch
<b>L) Length</b>	12 - 25 mm	1/2 - 1 inch
<b>Magazine Capacity</b>	110 staples	
<b>Staple Type</b>	Senco G4450 (=M)	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 97.20 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 90.70 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by  
UNI EN ISO 12100-1/2

## ACTUATION & LOADING

**Actuation System\*** 4  
(Safety : CT)

**Loading\*** Bottom Loading

\*see instruction manual

## APPLICATIONS

- garden furniture
- upholstery
- drawer guides
- case backs
- frame assembly
- panels and profile boards
- mouldings and decorative trims
- baseboards
- boat interiors
- trade shows
- shoe making
- toys and dolls
- TV and HI-FI screens
- manufactured houses
- picture frames
- remodelling
- dust covers
- sofas
- vehicle panels
- labelling
- underlayment
- fruit cases

## FASCO S.R.L. Italy

Via B. Buozzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

